

# Cambodian Birch

## Specifications



<b>ORIGIN</b>	Cambodia
<b>SPECIES</b>	White Birch
<b>CORE</b>	Eucalyptus, Rubberwood, or Eucalyptus/Rubberwood Combi
<b>FACE/BACK</b>	White Birch
<b>GRADE</b>	C2
<b>FINISH</b>	Raw, Prefinish
<b>SIZE</b>	48" x 96", 48.5" x 96.5"
<b>VEENER CUT</b>	Rotary Cut, WPF
<b>VEENER THICKNESS</b>	0.3mm
<b>SURFACE SANDING</b>	240-320 grit finish
<b>GLUE TYPE</b>	Interior, TSCA Title VI
<b>MOISTURE CONTENT</b>	<12%
<b>APPLICATIONS</b>	Cabinetry, furniture, shelving, trim work, lamination



THICKNESS	# OF PLYS	THICKNESS VARIATION	SHEETS PER CRATE
9mm	7	8.5mm – 9.3mm	104
12mm	9	11.5mm – 12.3mm	78
15mm	11	14.5mm – 15.3mm	62
18mm	13	17.5mm – 18.3mm	52



Source: Gravtex.eu

Based on availability, USply reserves the right to substitute product that may vary in species, core, country of origin, and/or other specifications.

# Indonesian Birch

## Specifications



<b>ORIGIN</b>	Indonesia
<b>SPECIES</b>	White Birch
<b>CORE</b>	Falcata & MLH
<b>FACE/BACK</b>	White Birch
<b>GRADE</b>	C2, C3, Market
<b>FINISH</b>	Raw, Prefinish
<b>SIZE</b>	48" x 96", 48.5" x 96.5"
<b>VEENER CUT</b>	Rotary Cut, WPF
<b>VEENER THICKNESS</b>	0.3mm
<b>SURFACE SANDING</b>	240-320 grit finish
<b>GLUE TYPE</b>	Interior, TSCA Title VI
<b>MOISTURE CONTENT</b>	<12%
<b>APPLICATIONS</b>	Cabinetry, furniture, shelving, trim work, lamination



THICKNESS	# OF PLYS	THICKNESS VARIATION	SHEETS PER CRATE
5.2mm	5	4.8mm-5.2mm	180
12mm	7-9	11.5mm-12.3mm	78
18mm	9-13	17.5mm-18.3mm	52



Source: Gravtex.eu

Based on availability, USply reserves the right to substitute product that may vary in species, core, country of origin, and/or other specifications.

# Vietnamese Birch

## Specifications



	WHITE BIRCH	WHITE BIRCH W/ MDF CORE	WHITE BIRCH W/ MAGNOLIA CORE
<b>ORIGIN</b>	Vietnam	Vietnam	Vietnam
<b>SPECIES</b>	White Birch	White Birch	White Birch
<b>CORE</b>	Acacia & Eucalyptus	MDF	Magnolia
<b>FACE/BACK</b>	White Birch	White Birch	White Birch
<b>GRADE</b>	B2, C2, C3, Market	C3	C2
<b>FINISH</b>	Raw, Prefinish	Raw	Raw
<b>SIZE</b>	48" x 96", 48.5" x 96.5", 48" x 120"	48" x 96"	48.5" x 96.5"
<b>VENEER CUT</b>	Rotary Cut, WPF	Rotary Cut, WPF	Rotary Cut, WPF
<b>VENEER THICKNESS</b>	0.3mm	0.3mm	0.3mm
<b>SURFACE SANDING</b>	240-320 grit finish	240-320 grit finish	240-320 grit finish
<b>GLUE TYPE</b>	Interior, TSCA Title VI	Interior, TSCA Title VI	Interior, TSCA Title VI
<b>MOISTURE CONTENT</b>	<12%	<12%	<12%
<b>APPLICATIONS</b>	Cabinetry, furniture, shelving, trim work, lamination	Cabinet door inserts and door panels	Cabinetry, furniture, shelving, trim work, lamination



WHITE BIRCH	5.2MM	9MM	12MM	15MM	18MM	25MM
<b># OF PLYS</b>	5	7	9	11	11-13	17
<b>THICKNESS VARIATION</b>	4.8mm-5.2mm	8.5mm-9.3mm	11.5mm-12.3mm	14.5mm-15.3mm	17.5mm-18.3mm	24.5mm-25.3mm
<b>SHEETS PER CRATE</b>	180	104	78	62	52	36
WHITE BIRCH W/ MDF CORE	5.2MM					
<b># OF PLYS</b>	3					
<b>THICKNESS VARIATION</b>	4.8mm-5.2mm					
<b>SHEETS PER CRATE</b>	180					
WHITE BIRCH W/ MAGNOLIA CORE					18MM	
<b># OF PLYS</b>					13	
<b>THICKNESS VARIATION</b>					17.5mm-18.3mm	
<b>SHEETS PER CRATE</b>					52	



Based on availability, USply reserves the right to substitute product that may vary in species, core, country of origin, and/or other specifications.

# Cabinet Liner

## Specifications



<b>ORIGIN</b>	Cambodia
<b>CORE</b>	Eucalyptus / Pine
<b>FACE/BACK</b>	HPL, Hardwood Veneer
<b>FINISH</b>	White, Black, Gray
<b>SIDES</b>	1-Side, 2-Side
<b>SIZE</b>	48" x 96"
<b>HPL THICKNESS</b>	0.5mm
<b>GLUE TYPE</b>	Interior, TSCA Title VI
<b>MOISTURE CONTENT</b>	<12%
<b>APPLICATIONS</b>	Cabinet box construction, as well as casing and shelving



WHITE CABINET LINER	5.2MM	12MM	15MM	18MM
# OF PLYS	5	9	11	13
THICKNESS VARIATION	4.8mm-5.2mm	11.5mm-12.3mm	14.5mm-15.3mm	17.5mm-18.3mm
SHEETS PER CRATE	180	78	62	52
BLACK CABINET LINER				18MM
# OF PLYS				13
THICKNESS VARIATION				17.5mm-18.3mm
SHEETS PER CRATE				52
GRAY CABINET LINER				18MM
# OF PLYS				13
THICKNESS VARIATION				17.5mm-18.3mm
SHEETS PER CRATE				52



Based on availability, USply reserves the right to substitute product that may vary in species, core, country of origin, and/or other specifications.

# Meranti

## Specifications



<b>ORIGIN</b>	Malaysia
<b>SPECIES</b>	Meranti
<b>CORE</b>	Mixed Tropical Hardwood
<b>FACE/BACK</b>	Meranti
<b>GRADE</b>	OVL/BTR
<b>FINISH</b>	Raw
<b>SIZE</b>	48" x 96"
<b>VENEER CUT</b>	Rotary Cut, WPF
<b>VENEER THICKNESS</b>	0.5mm
<b>SURFACE SANDING</b>	240-320 grit finish
<b>GLUE TYPE</b>	Interior, TSCA Title VI
<b>MOISTURE CONTENT</b>	<12%
<b>APPLICATIONS</b>	Paneling, trailer liner, bookshelf backs, store fixtures, furniture components



THICKNESS	# OF PLYS	THICKNESS VARIATION	SHEETS PER CRATE
2.7mm	3	2.5mm-2.7mm	330
3.6mm	3	3.4mm-3.6mm	260
5.2mm	5	4.8mm-5.2mm	180



Based on availability, USply reserves the right to substitute product that may vary in species, core, country of origin, and/or other specifications.

# Bending Plywood

## Specifications



<b>ORIGIN</b>	Malaysia
<b>SPECIES</b>	Ceiba
<b>CORE</b>	Ceiba
<b>FACE/BACK</b>	Ceiba
<b>FORMAT</b>	Barrel, Column
<b>THICKNESS</b>	8mm
<b># OF PLYS</b>	5
<b>THICKNESS VARIATION</b>	7.5mm-8.2mm
<b>SIZE</b>	96" x 48" (Barrel Short Grain) 48" x 96" (Column Long Grain)
<b>VENEER CUT</b>	Jointed Veneer
<b>VENEER THICKNESS</b>	2.0mm
<b>SURFACE SANDING</b>	240-320 grit finish
<b>GLUE TYPE</b>	Interior, TSCA Title VI
<b>MOISTURE CONTENT</b>	<12%
<b>SHEET PER CRATE</b>	110
<b>APPLICATIONS</b>	Columns and arches, curved cabinetry, rounded furniture

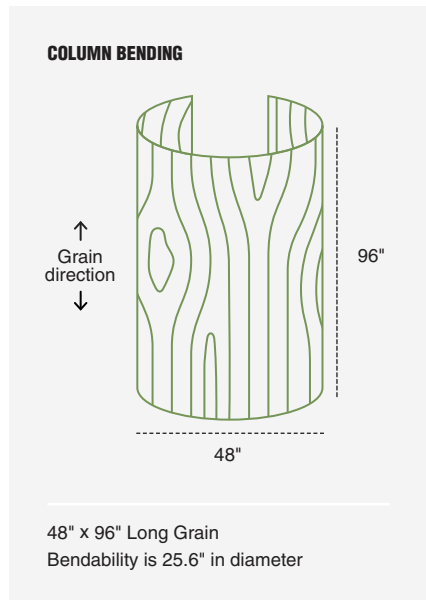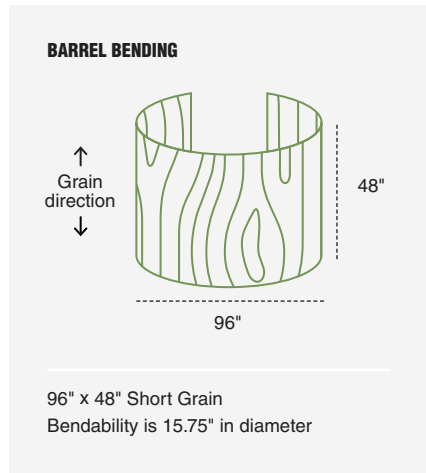

Based on availability, USply reserves the right to substitute product that may vary in species, core, country of origin, and/or other specifications.

# White Maple

## Specifications



	5.2MM	12MM / 18MM
<b>ORIGIN</b>	Vietnam	Vietnam
<b>SPECIES</b>	White Maple	White Maple
<b>CORE</b>	Acacia or Eucalyptus	Magnolia
<b>FACE/BACK</b>	White Maple	White Maple
<b>GRADE</b>	B4	B2
<b>FINISH</b>	Raw, Prefinish	Raw, Prefinish
<b>SIZE</b>	48.5" x 96.5"	48.5" x 96.5"
<b>VENEER CUT</b>	Rotary Cut, WPF	Rotary Cut, WPF
<b>VENEER THICKNESS</b>	0.3mm	0.3mm
<b>SURFACE SANDING</b>	240-320 grit finish	240-320 grit finish
<b>GLUE TYPE</b>	Interior, TSCA Title VI	Interior, TSCA Title VI
<b>MOISTURE CONTENT</b>	<12%	<12%
<b>APPLICATIONS</b>	Cabinetry, furniture, paneling, decorative veneer	Cabinetry, furniture, paneling, decorative veneer

THICKNESS	# OF PLYS	THICKNESS VARIATION	SHEETS PER CRATE
5.2mm	5	4.8mm-5.2mm	180
12mm	9	11.5mm-12.3mm	78
18mm	13	17.5mm-18.3mm	52



Based on availability, USply reserves the right to substitute product that may vary in species, core, country of origin, and/or other specifications.



# Advantage Decorative Hardwoods

## Specifications

	RED OAK (PLAIN SLICED)	RED OAK (ROTARY CUT)	WHITE OAK
<b>ORIGIN</b>	Vietnam	Vietnam	Vietnam
<b>SPECIES</b>	Red Oak	Red Oak	White Oak
<b>CORE</b>	Magnolia	Magnolia	Magnolia
<b>FACE/BACK</b>	Red Oak	Red Oak	White Oak
<b>GRADE</b>	B2	B2	A1, A2
<b>FINISH</b>	Raw, Prefinish	Raw, Prefinish	Raw, Prefinish
<b>SIZE</b>	48.5" x 96.5"	48.5" x 96.5"	48.5" x 96.5"
<b>VENEER CUT</b>	Plain Sliced	Rotary Cut, WPF	Rift Cut
<b>VENEER LAYOUT</b>	Book Matched	WPF	Slip Matched
<b>VENEER THICKNESS</b>	0.5mm	0.5mm	0.5mm
<b>SURFACE SANDING</b>	240-320 grit finish	240-320 grit finish	240-320 grit finish
<b>GLUE TYPE</b>	Interior, TSCA Title VI	Interior, TSCA Title VI	Interior, TSCA Title VI
<b>MOISTURE CONTENT</b>	<12%	<12%	<12%
<b>APPLICATIONS</b>	Cabinetry, furniture, millwork, casework, moulding	Cabinetry, furniture, millwork, casework, moulding	Cabinetry, furniture, millwork, casework, moulding



Based on availability, USply reserves the right to substitute product that may vary in species, core, country of origin, and/or other specifications.



# Advantage Decorative Hardwoods

## Specifications

<b>RED OAK (PLAIN SLICED)</b>	<b>5.2MM</b>	<b>12MM</b>	<b>18MM</b>
# OF PLYS	5	9	13
THICKNESS VARIATION	4.8mm - 5.2mm	11.5mm - 12.3mm	17.5mm - 18.3mm
SHEETS PER CRATE	180	78	52
<b>RED OAK (ROTARY CUT)</b>	<b>5.2MM</b>	<b>12MM</b>	<b>18MM</b>
# OF PLYS	5		13
THICKNESS VARIATION	4.8mm - 5.2mm		17.5mm - 18.3mm
SHEETS PER CRATE	180		52
<b>WHITE OAK</b>	<b>5.2MM</b>	<b>12MM</b>	<b>18MM</b>
# OF PLYS	5	9	13
THICKNESS VARIATION	4.8mm - 5.2mm	11.5mm - 12.3mm	17.5mm - 18.3mm
SHEETS PER CRATE	180	78	52



Source: Studio Lithe

Based on availability, USply reserves the right to substitute product that may vary in species, core, country of origin, and/or other specifications.

# Trident Marine

## Specifications



<b>ORIGIN</b>	Malaysia
<b>CORE</b>	Medang / Kelat
<b>FACE/BACK</b>	Meranti / Pink Kedondong
<b>GRADE</b>	B/BB
<b>FINISH</b>	Raw
<b>SIZE</b>	48" x 96"
<b>VENEER CUT</b>	Rotary Cut, WPF
<b>VENEER THICKNESS</b>	1.0mm
<b>SURFACE SANDING</b>	120-240 grit finish
<b>GLUE TYPE</b>	WBP EPA Certified
<b>MOISTURE CONTENT</b>	8%-12%

**APPLICATIONS** Boats, ships, docks, baths, kitchens, decks, patios, porches



THICKNESS	# OF PLYS	THICKNESS VARIATION	SHEETS PER CRATE
12mm	7	11.5mm-12.5mm	78
18mm	9	17.5mm-18.5mm	52



TRIDENT MARINE FOLLOWS ALL GUIDELINES PER STANDARD GRADING BS 1088.

Based on availability, USply reserves the right to substitute product that may vary in species, core, country of origin, and/or other specifications.

# Trident Marine

Standard Grading BS 1088



NATURAL DEFECTS		
NUMBER	CATEGORY OF DEFECT	BB
1	Burls	Permitted
2	Pin Knots	Permitted
3	Live Knots	Permitted, 5 per m2 from face. Max dia. 25mm and not clustered
4	Knot Holes	Not Permitted
5	Color Variation	Permitted, not many
6	Stain/Mineral Streaks	Permitted, not many
7	Dry Pitch and Back Pocket	Permitted, Light 2 per m2, max width 4mm and max length 100mm, well filled
8	Wormholes, Pinholes, Worm Tracks	Permitted, small, no color change and not long, puttied
9	Vine Marks	Permitted, not many, lightly sanded and smooth
10	Joints	Permitted, max 3 joints, open width max 3mm and max length 10% of panels length and puttied
11	Splits-Open	Permitted
12	Splits - Filled or Puttied	Permitted, max 2 per panel on panel end, max width 5mm max length 8.5% of panel length, tight and color match
13	Fill or Putty Smears	Permitted, slight and smooth sanded
14	Rough Cut	Permitted, slight
15	Shims	Permitted, max 5mm, length 300mm, tight and color match
16	Knife Marks	Permitted, width 0.8mm and slight
17	Tape/Glue Residue	Permitted, slight and smooth sanded
18	Sanding	Permitted, slight
19	Chicken Tracks	Permitted

Based on availability, USply reserves the right to substitute product that may vary in species, core, country of origin, and/or other specifications.